


BluePad-5000 v5 (no printer)

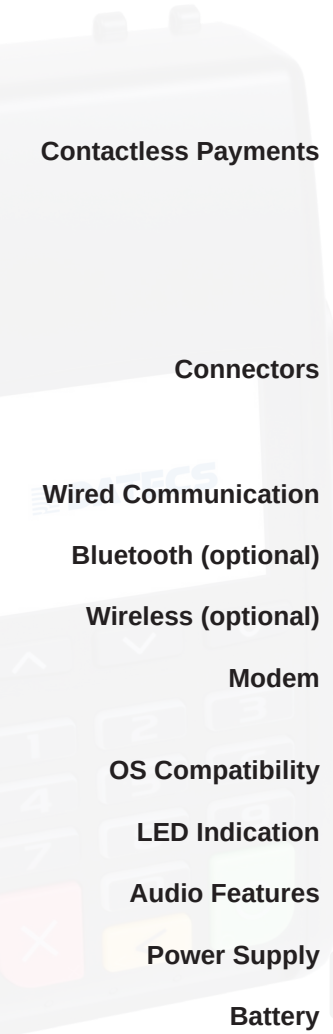

Display	320 x 240 px TFT Color LCD
Buttons	On/Off button, 10 numeric buttons, 5 function buttons, Backlight
Magnetic Card Reader	Triple track bi-directional
Smart Card Reader	Landing type
Contactless Reader	ISO/IEC 14443 Type A MIFARE Mini, MIFARE Classic 1K, MIFARE Classic 4K, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Plus 2K, MIFARE Plus 4K, MIFARE DESFire ISO/IEC 14443 Type B ISO/IEC 15693 JIS X 6319-4 - FeliCa ISO/IEC 18000-3 - NFC
Contactless Payments	VISA payWave MasterCard Contactless American Express ExpressPay Discover D-Pas UnionPay QuickPass JCB J/Speedy
Connectors	USB Micro port SIM card slot (optional) SAM card slot (optional)
Wired Communication	USB (device)
Bluetooth (optional)	BT version 3.0 power class 2
Wireless (optional)	Wi-Fi IEEE 802.11 b/g/n
Modem	2G communication (optional) 3G communication (optional)
OS Compatibility	iOS, Android, Windows
LED Indication	Contactless payment status
Audio Features	Electromagnetic buzzer
Power Supply	DC 9 V through power adapter
Battery	Rechargeable Li-Ion Battery 7.4 V, 1100 mAh
Reliability	500,000 chip card cycles 1,000,000 magnetic card swipes 1,000,000 button clicks
Certificates	CE, FCC, PCI PTS 5.x, EMV Level 1, EMV Level 2, EMV Level 1 Contactless, Apple Mfi
Dimension W x D x H	76 x 172 x 49 mm
Weight	272 g
Operational Temperature	-10 °C to 40 °C / 5 to 90% RH
Storage Temperature	-15 °C to 50 °C / 5 to 90% RH