


Kiosk Printer DK1-31 / DK1-31F

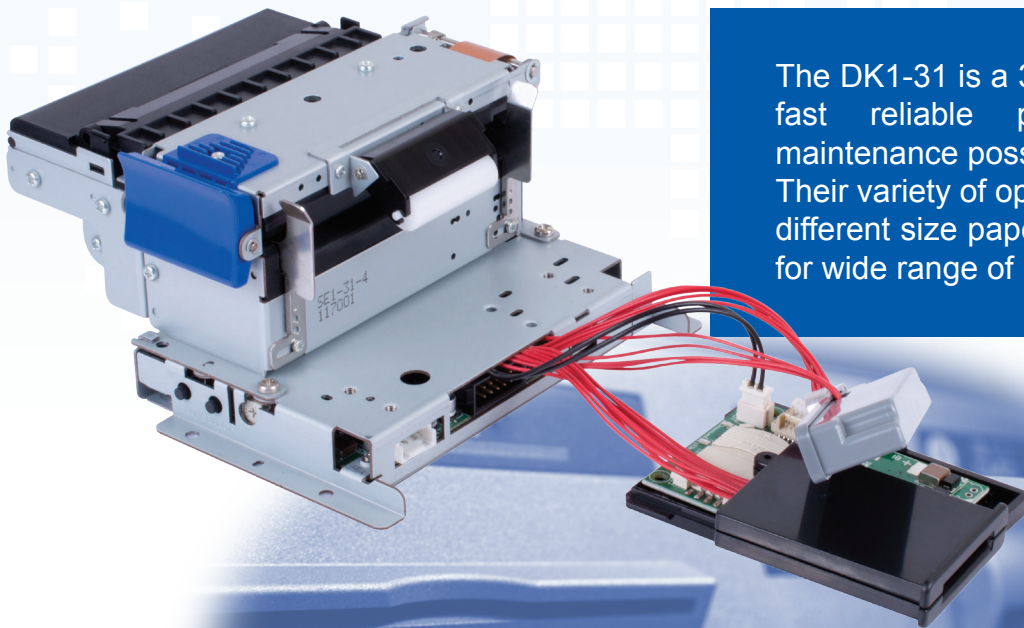

The DK1-31 is a 3-inch printer designed to offer fast reliable printing with the easiest maintenance possible.

Their variety of options like bezel, presenter and different size paper holders make them suitable for wide range of kiosk applications.

DK1-31 / DK1-31F	
Printing Mechanism	Direct line thermal printer Sanei SE1-31
Printing Width	80 mm (640 dots)
Printing Resolution	203 x 203 dpi (8 x 8 dpmm)
Max Printing Speed	200 mm per second
Printable Font Sizes	Font A - 12 x 32 dots Font B - 12 x 16 dots (Electronic Journal)
Printable Barcode Types	1D: EAN-13, EAN-8, Code 128, Interleaved 2 of 5
Paper Type	Thermal paper rolls
Paper Width	83, 80, 60 or 58 mm
Paper Thickness	59 to 150 µm
Roll Max Diameter	102 mm
Paper Loading	Easy paper loading
Post Printing Features	Auto cutter Bezel (optional) Presenter (optional)
Emulation	ESC/POS Datecs Proprietary Fiscal Protocol
Connectivity	RS-232C (max 115200 bps) USB 2.0 (printer recognized as virtual com port) GPRS Module (optional)
Power Supply	AC 100 to 240 V, 50 to 60 Hz, DC 24 V, 2 A
Reliability	200 million pulses, 150 km (Thermal head) 1.5 million cuts (Auto cutter)
Certificates	CE
Dimensions W x D x H	127 x 146 x 89 mm
Weight	630 g
Operational temperature range	-15 to 40 °C, 35 to 85 % RH
Storage temperature range	-20 to 60 °C, 10 to 90 % RH
Compatible Accessories	Large Paper Roll Holder